



Individual 4G SIM card per unit

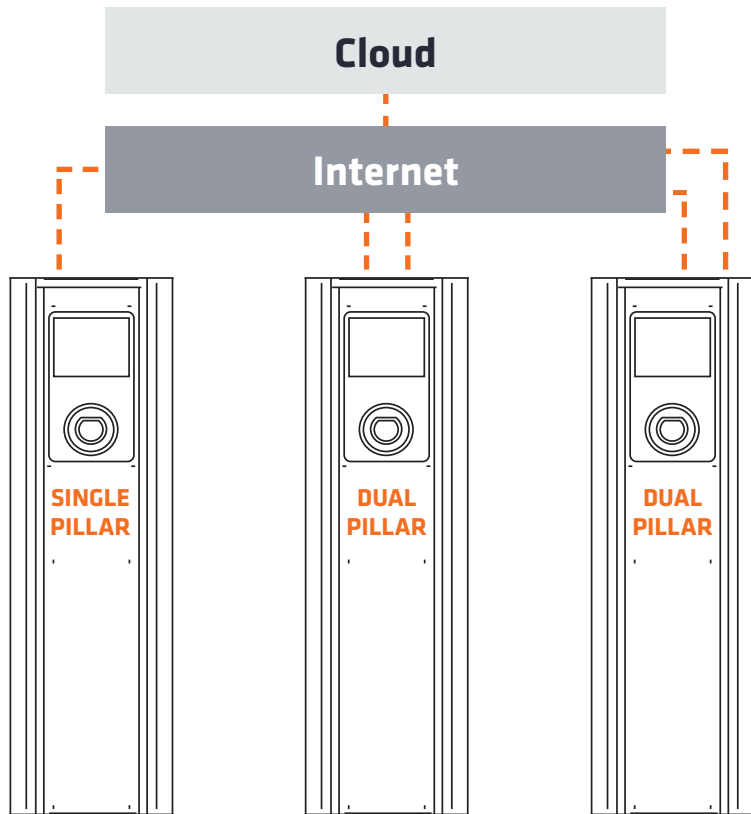

4G data charges apply per outlet
Load balancing via cloud only

4G router/Wi-Fi repeater module

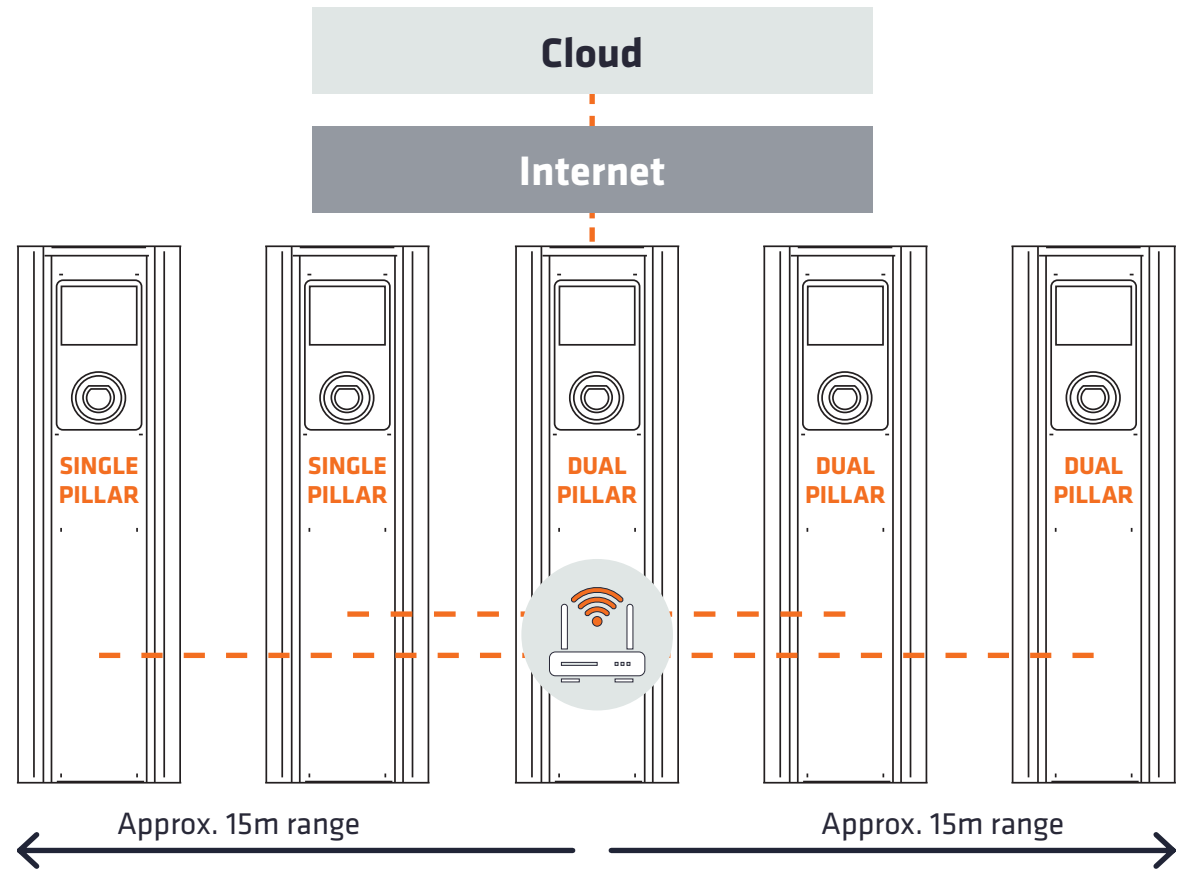


1x 4G data charge applies per router

Router requires IP rated 3-pin socket (by others)

Ensure suitable 4G signal available on site


With active load balancing, power not being used by the building is sent to the charging group

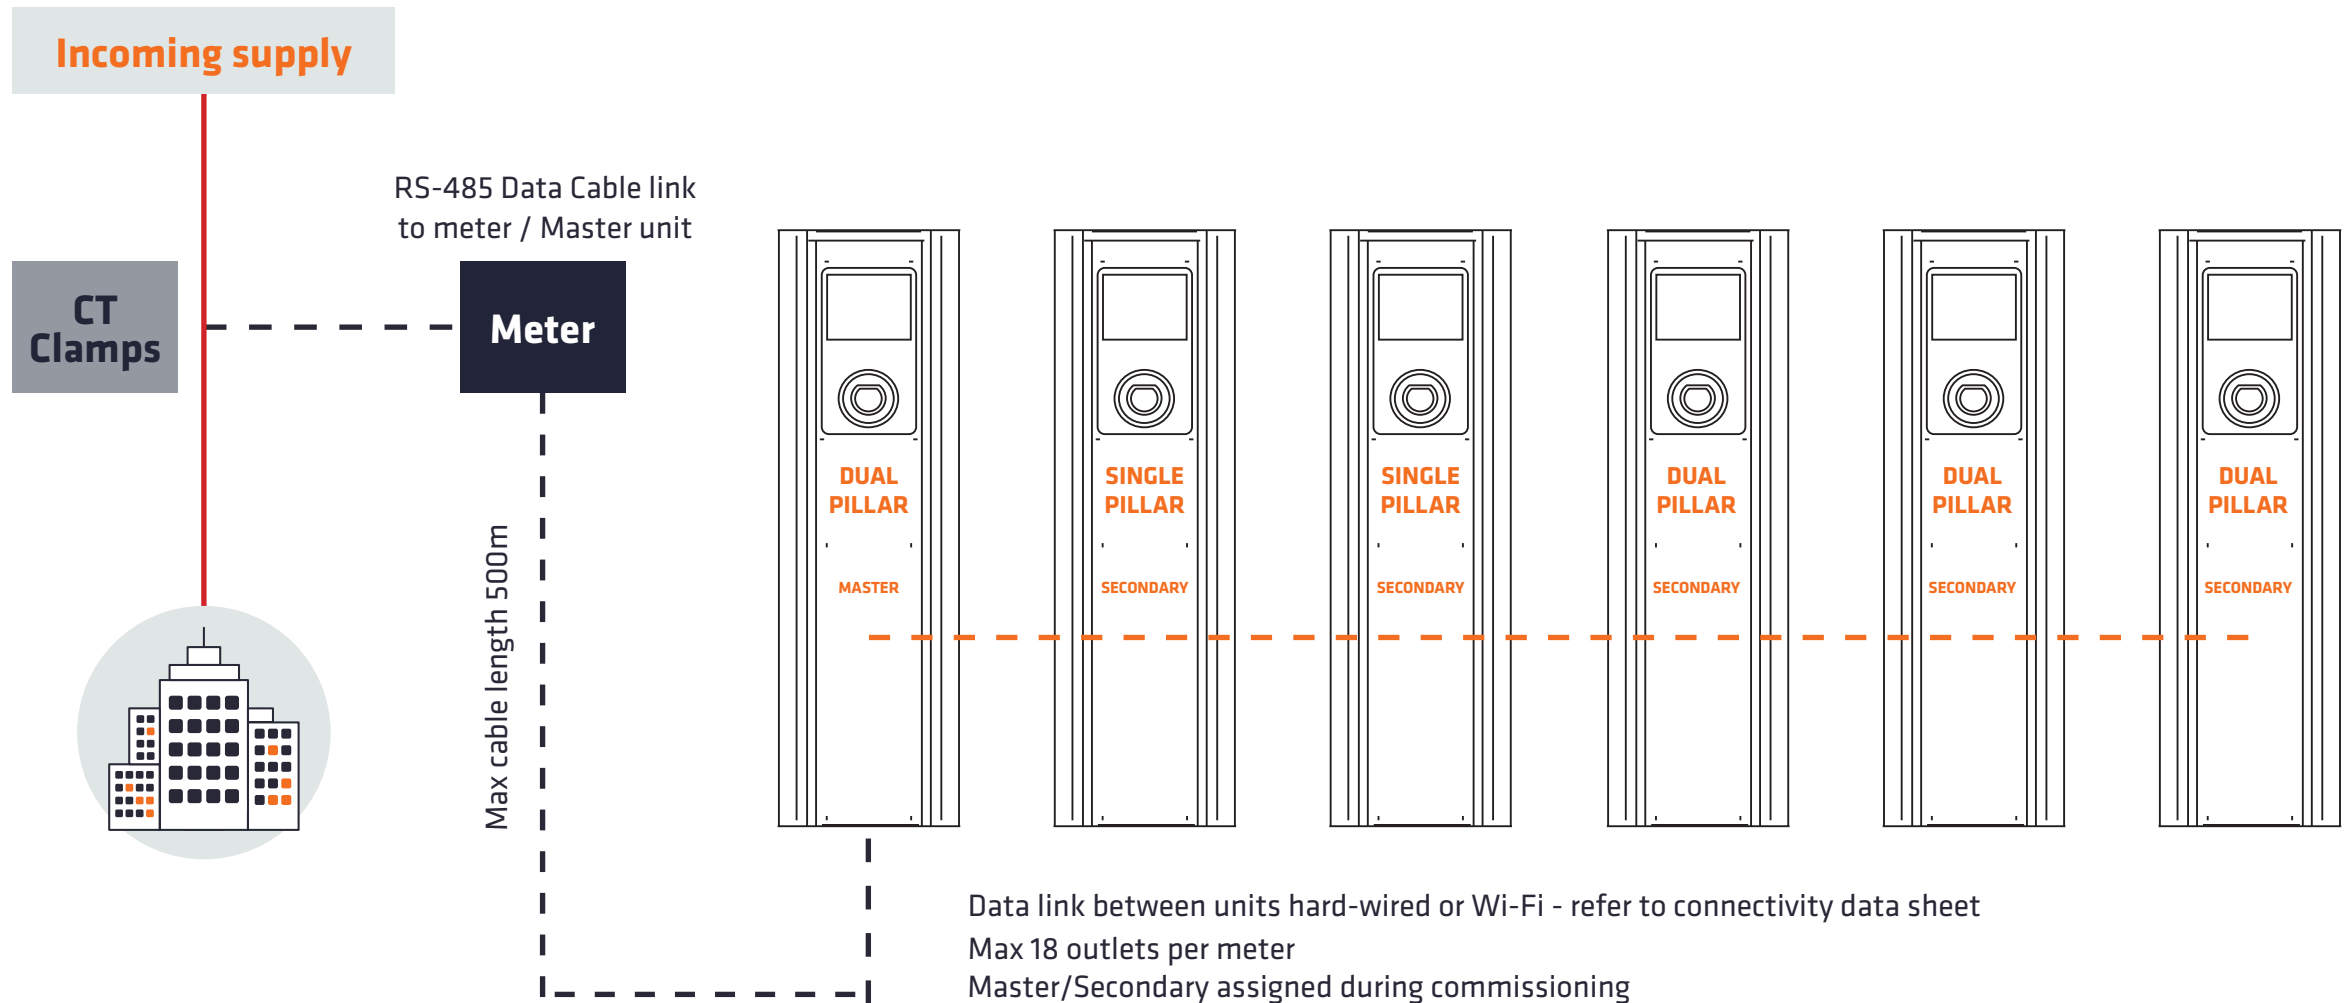


Hardwired data cable Cat 5/6 (one cable per outlet)

Single outlet pillar requires 1x cable

Dual outlet pillar requires 2x cable

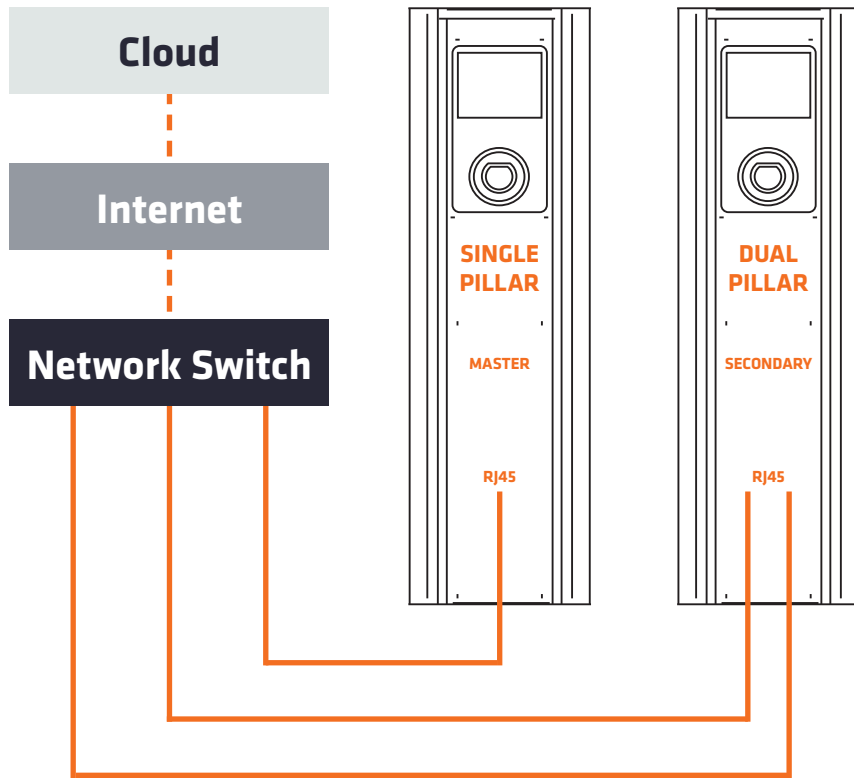


Wi-Fi connection (ensure signal strength sufficient)

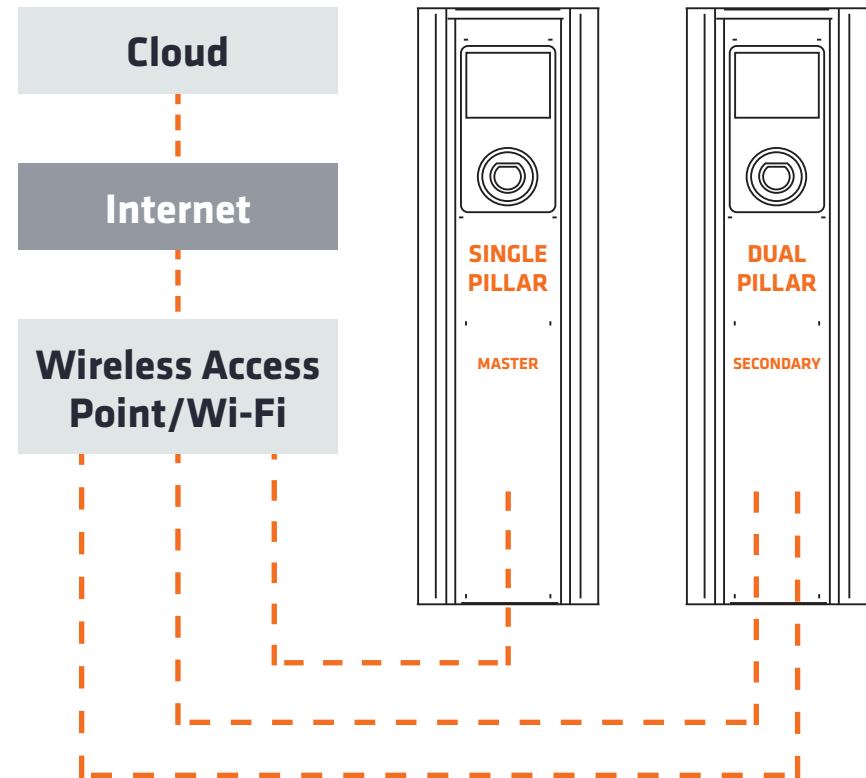

All outlets in a group must connect to the same network or Wi-Fi

Standard power connection (one feed per outlet)

Single outlet pillar requires 1x cable
Dual outlet pillar requires 2x cable

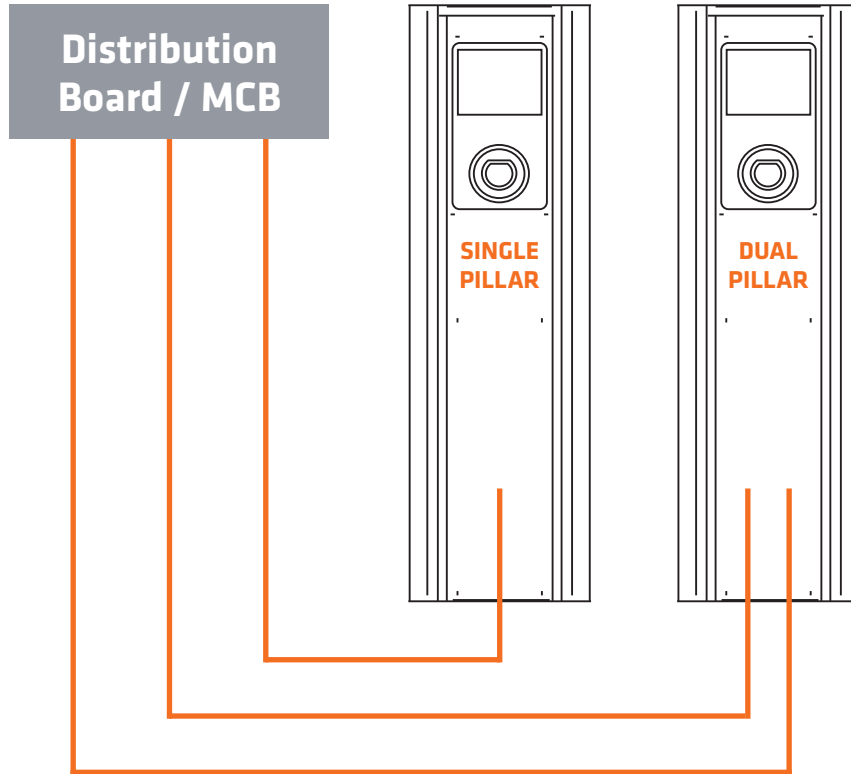

Splitter box version (single power feed)

Dual or quad outlet pillar requires 1x cable

