



Individual 4G SIM card per unit

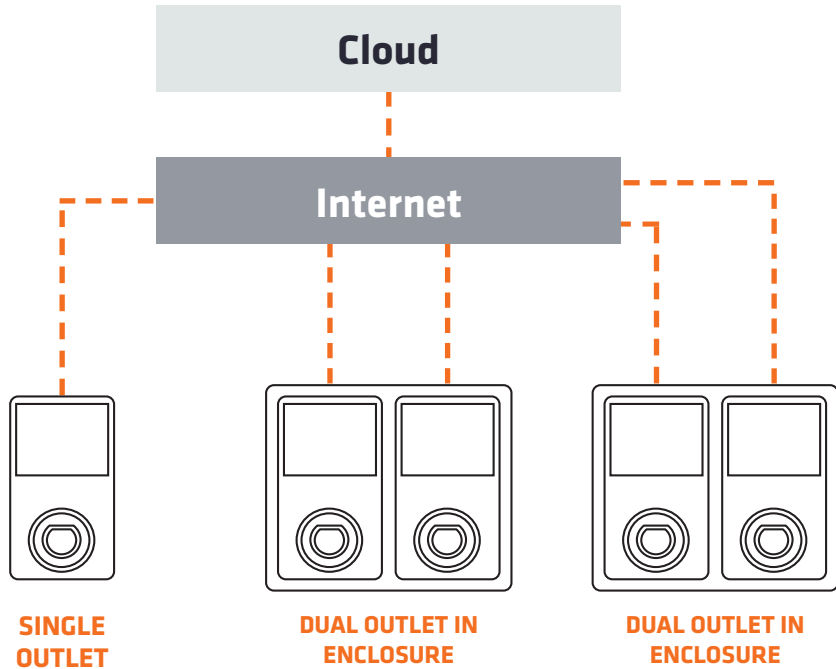

4G data charges apply per outlet
Load balancing via cloud only


4G router/Wi-Fi repeater module

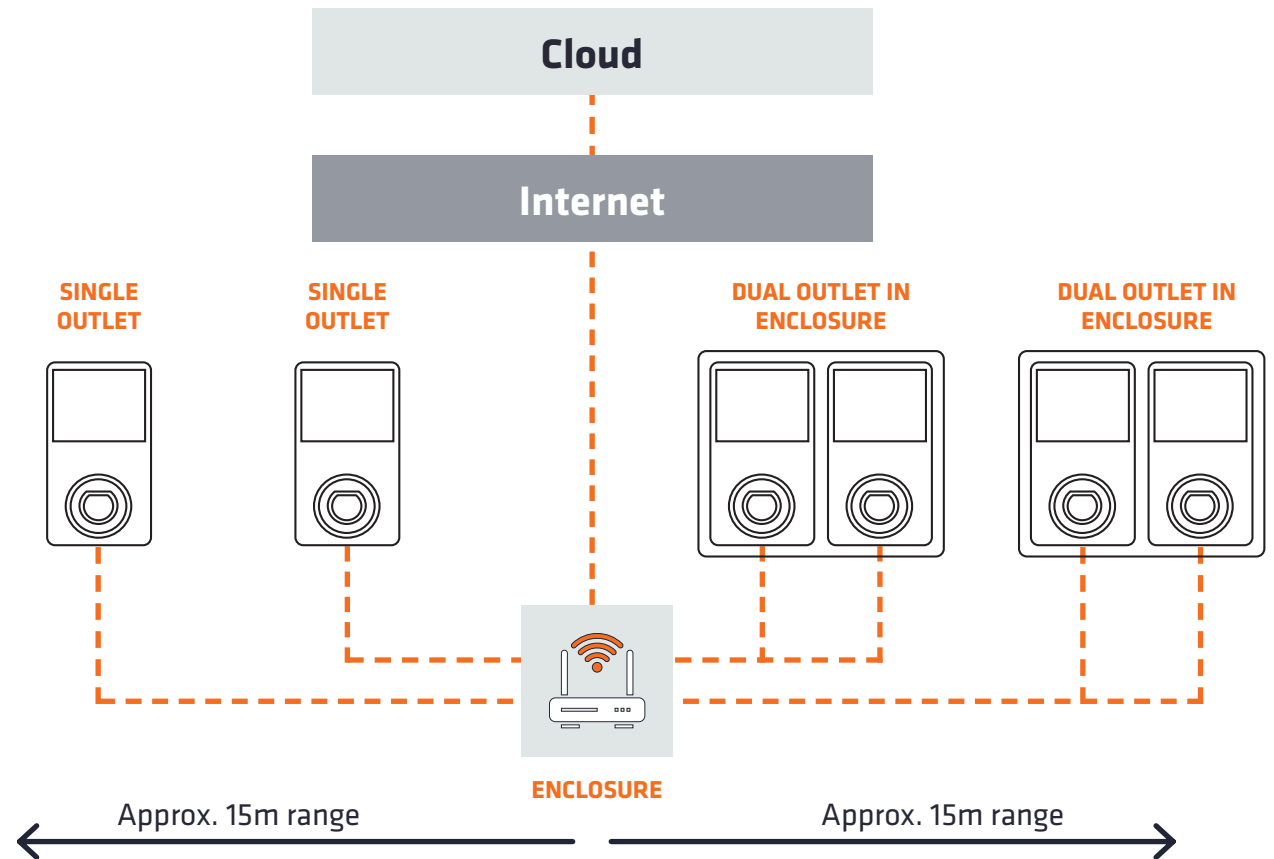

1x 4G data charge applies per router


Router requires IP rated enclosure and 3-pin socket (by others)
Ensure suitable 4G signal available on site

With active load balancing, power not being used by the building is sent to the charging group

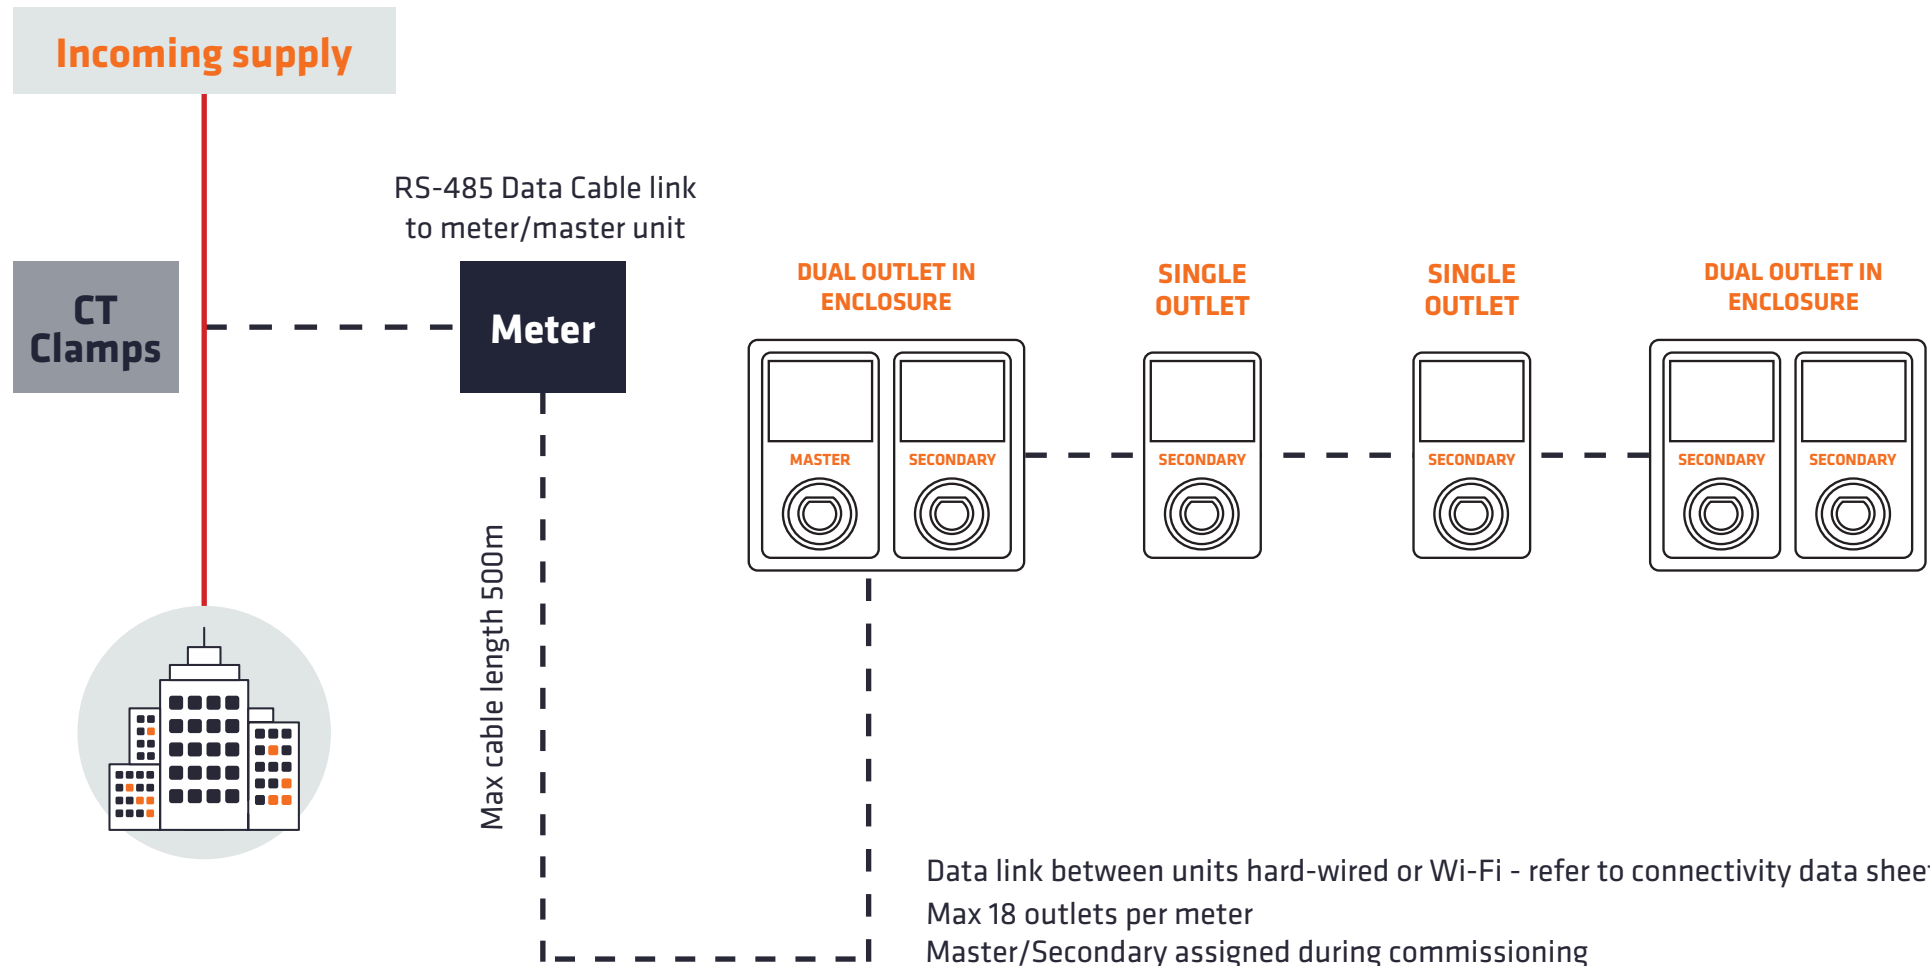


Hardwired data cable Cat 5/6 (one cable per outlet)

Single outlet requires 1x cable
Dual outlet requires 2x cable

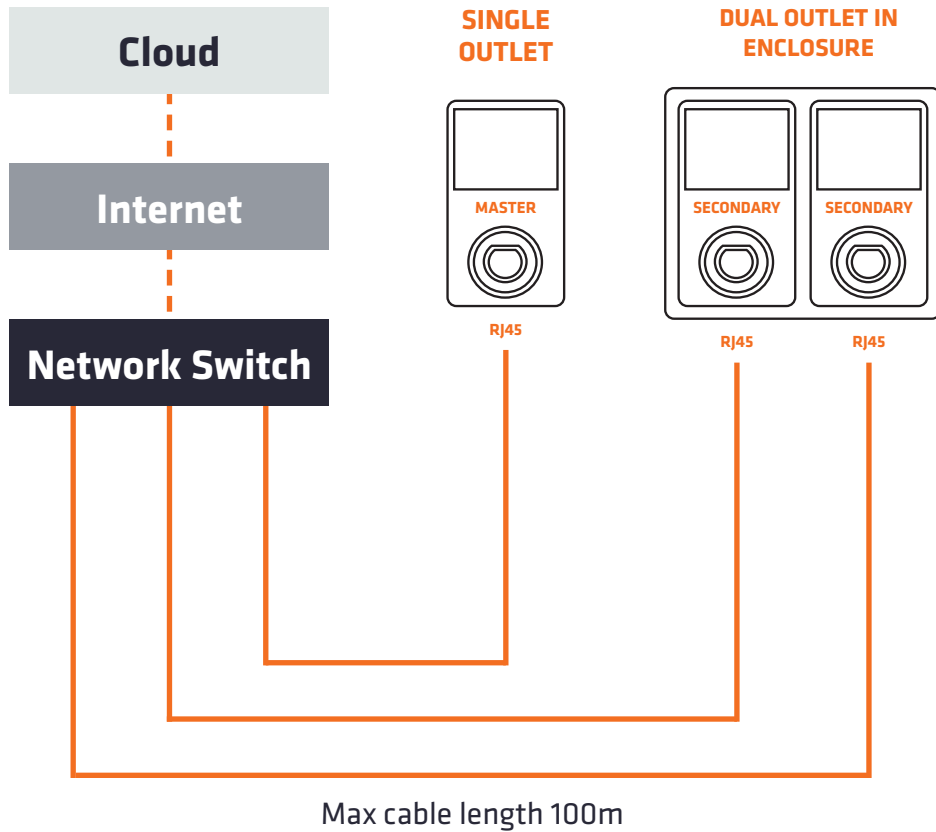

Wi-Fi connection (ensure signal strength sufficient)

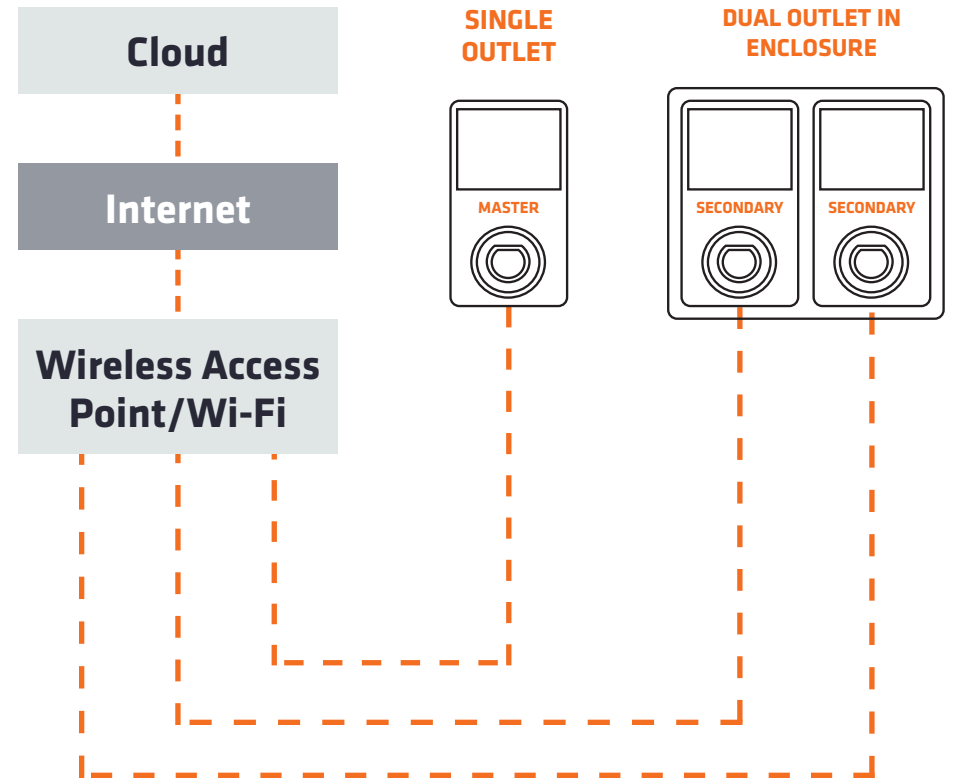


All outlets in a group must connect to the same network or Wi-Fi

Standard power connection (one feed per outlet)

Single outlet requires 1x cable

Dual outlet requires 2x cable

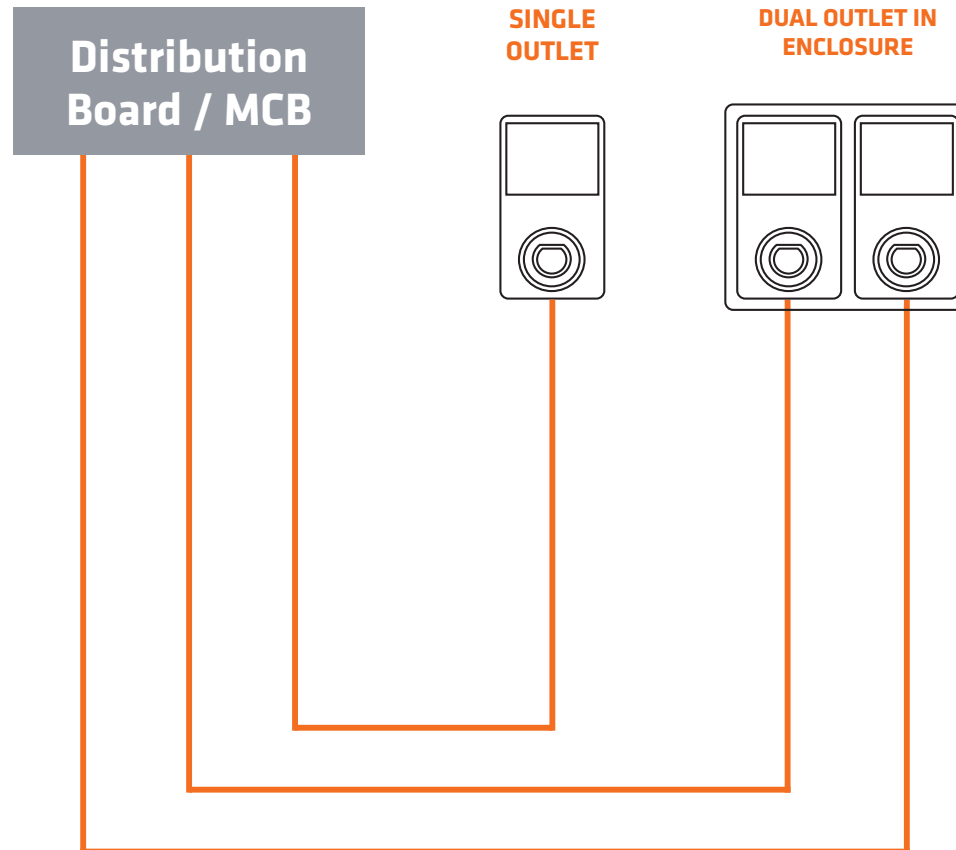

7.4 kW single phase supply / 11 and 22 kW three phase supply