



MAXICHARGER DC DH 280KW-480KW

PRODUCT NAME	PRODUCT CODE	OUTPUT POWER	AC INPUT VOLTAGE
MaxiCharger DC DH280	MDH280	280kW	Three phase 400V AC $\pm$ 10%
MaxiCharger DC DH320	MDH320	320kW	Three phase 400V AC $\pm$ 10%
MaxiCharger DC DH360	MDH360	360kW	Three phase 400V AC $\pm$ 10%
MaxiCharger DC DH400	MDH400	400kW	Three phase 400V AC $\pm$ 10%
MaxiCharger DC DH440	MDH440	440kW	Three phase 400V AC $\pm$ 10%
MaxiCharger DC DH480	MDH480	480kW	Three phase 400V AC $\pm$ 10%

SIDE VIEW

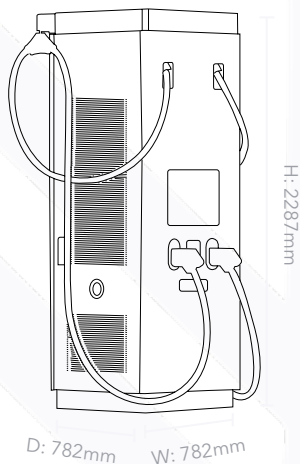

FRONT VIEW

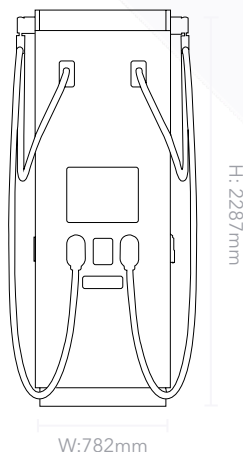

MAXICHARGER DC DH 280KW-480KW

DC OUTPUT CONNECTION

CHARGING MODE	Mode 4 CCS2
OUTPUT VOLTAGE	150-1000V
MAX OUTPUT CURRENT	Liquid-cooled Cable: : 500A (Max. 650A)
NUMBER OF OUTPUTS	2*CCS2
PEAK EFFICIENCY	≥96%

GENERAL

EARTHING SYSTEM	3P+PE
USER INTERFACE	15.6 inch LCD Touch Screen Autel Charge app, Autel Charge cloud 4G, Wi-Fi, Ethernet
COMMUNICATION PROTOCOLS	OCPP 1.6J (OCPP 2.0.1 optional)
USER AUTHENTICATION	App, RFID card, credit card optional (<i>back office subscription required</i>)
IP & IK RATING	IP54, IK10
UNIT DIMENSIONS	2287 x 782 x 782 mm (H x W x D)
OPERATING TEMPERATURE RANGE	-35°C ~ +55°C
SAFETY STANDARDS	IEC 61851-1, IEC 61851-21-2, IEC 61000, Eichrecht
CERTIFICATION	CE; UKCA; TR25; ETSI EN 303645; TÜV, EMC Class A
WARRANTY	2 years parts warranty as standard (<i>additional years available to purchase</i>)