




MAXICHARGER DC DH 80-240KW

MAXICHARGER DC DH 80KW-240KW



Dual output with simultaneous charging



Output 2*CCS2



Multiple payment options app, RFID, credit card & smartphone



Remote updates and diagnostics



Superfast charging



Seamless OCPP integration
(OCPP 1.6 compliant, 2.0.1 ready)



27 inch LCD Touch Screen




2 year parts warranty
(additional years available to purchase)

PRODUCT OVERVIEW


MaxiCharger DC DH 80kW-240kW

PRODUCT NAME	PRODUCT CODE	OUTPUT POWER	AC INPUT VOLTAGE
MaxiCharger DC DH80	MDH80	80kW	Three phase 400V AC+10%
MaxiCharger DC DH120	MDH120	120kW	Three phase 400V AC±10%
MaxiCharger DC DH160	MDH160	160kW	Three phase 400V AC±10%
MaxiCharger DC DH200	MDH200	200kW	Three phase 400V AC±10%
MaxiCharger DC DH240	MDH240	240kW	Three phase 400V AC±10%

SIDE VIEW

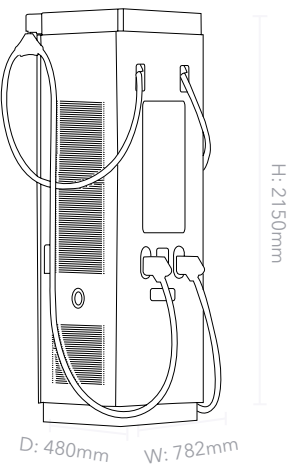

FRONT VIEW

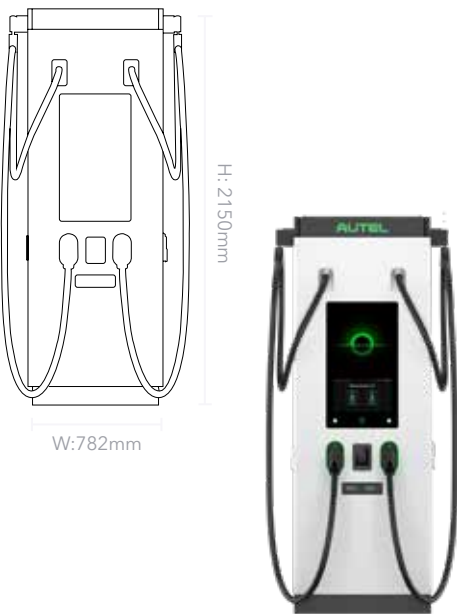

TECHNICAL DATA

DC OUTPUT CONNECTION

CHARGING MODE	Mode 4 CCS2
OUTPUT VOLTAGE	150-1000V
MAX OUTPUT CURRENT	Uncooled Cable: 380A (Max. 500A)
NUMBER OF OUTPUTS	2*CCS2
PEAK EFFICIENCY	≥96%

GENERAL

EARTHING SYSTEM	3P+PE
USER INTERFACE	27 inch LCD Touch Screen Autel Charge app, Autel Charge cloud 4G, Wi-Fi, Ethernet
COMMUNICATION PROTOCOLS	OCPP 1.6J (OCPP 2.0.1 optional)
USER AUTHENTICATION	App, RFID card, credit card optional <i>(back office subscription required)</i>
IP & IK RATING	IP54, IK10
UNIT DIMENSIONS	2150 x 782 x 480 mm (H x W x D)
OPERATING TEMPERATURE RANGE	-35°C ~ +55°C
SAFETY STANDARDS	IEC 61851-1, IEC 61851-21-2, IEC 61000, Eichrecht
CERTIFICATION	CE; UKCA; TR25; ETSI EN 303645; TÜV, EMC Class A
WARRANTY	2 years parts warranty as standard <i>(additional years available to purchase)</i>